
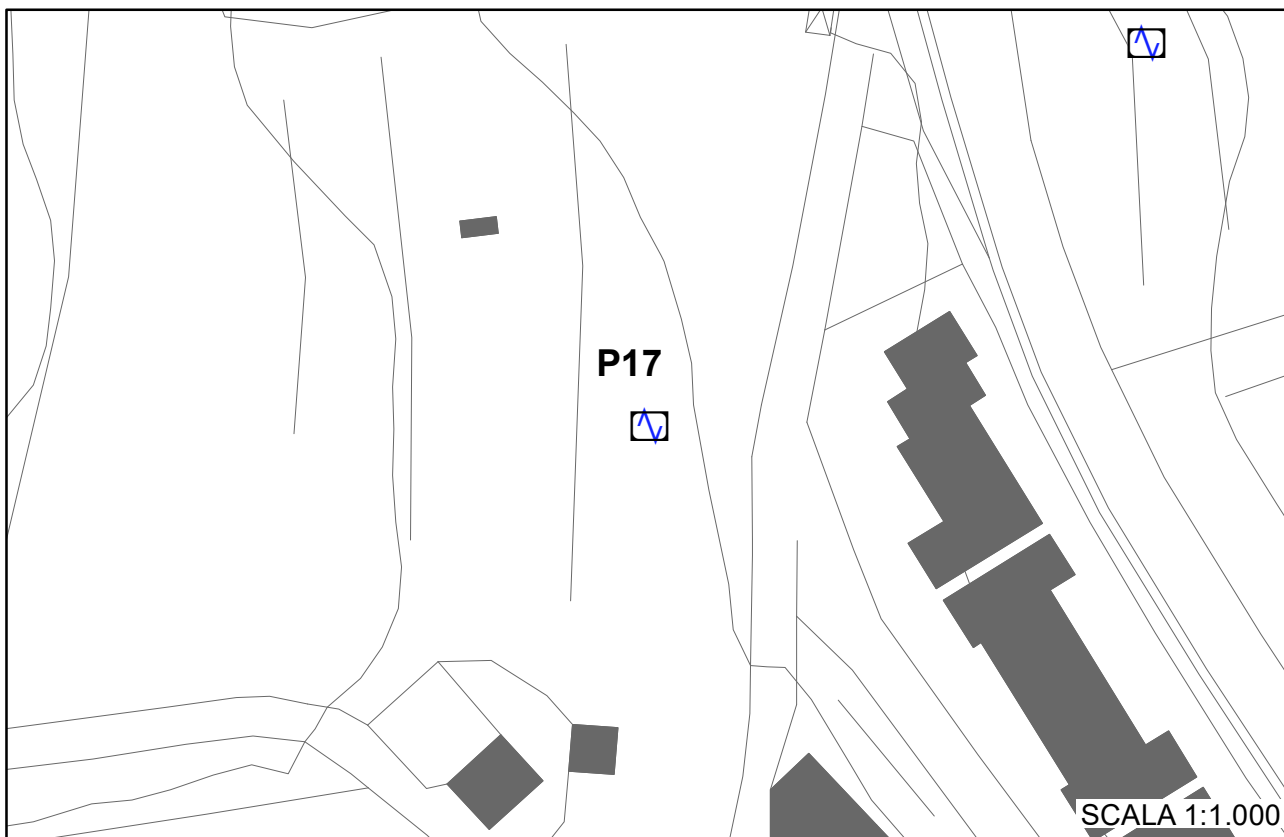


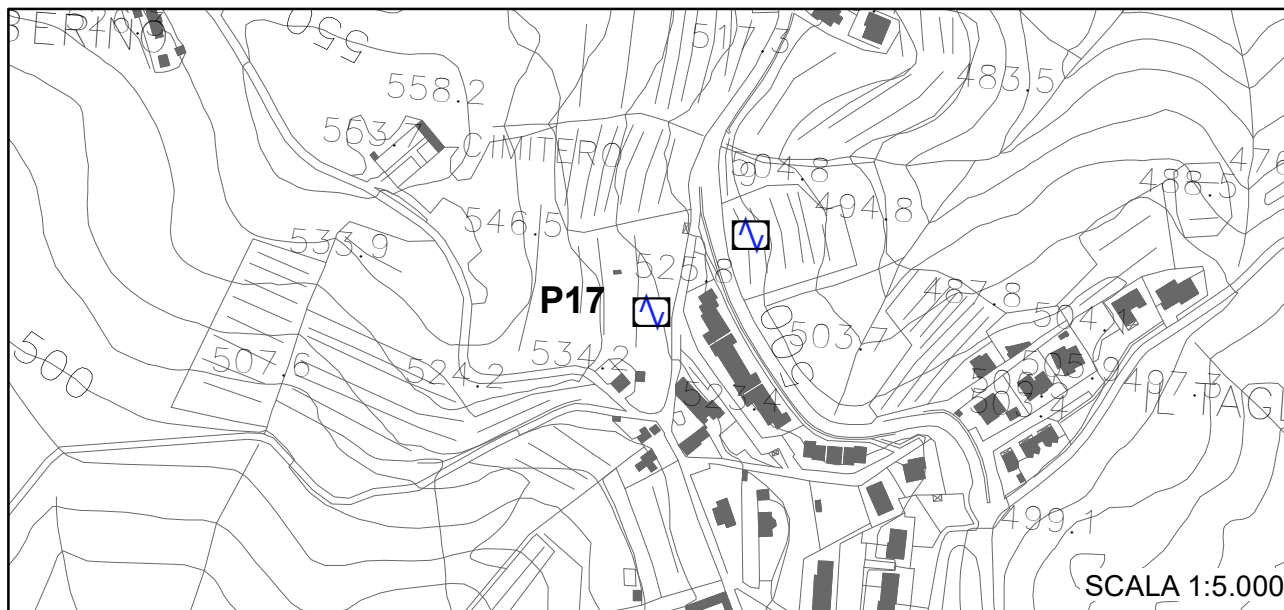

COMUNE DI CASTELNUOVO BERARDENGA MICROZONAZIONE SISMICA II° LIVELLO

Misure di microtremore a stazione singola HVSR
Indagine n°: P17

Località: Vagliagli 3

Data: 12 Giugno 2022

LEGENDA

Tipologia prova

 HVSR

P xxx indagine puntuale


Riferimento misura: **HVSR Vagliagli_3**
 File saf: **MT_20220530_123105.SAF**
 Durata delle registrazione min.: **30**
 Frequenza di campionamento: **300 Hz**
 Lunghezza delle finestre: **60 s**
 N° finestre selezionate: **22**
 Tipo di lisciamento: **coseno**
 Lisciamento: 10%
 Picco H/V : $f_0 = 0.95 \text{ Hz}$, $A_0 = 1.86$

Studio
Georicerche snc
 PI e CF: 01232900520
 di Luca Caselli & Roberto Cerri - geologi
 Via Pietro Nenni, 82/2 Loc. BADESSE
 53035 - MONTERIGGIONI (SI)
 Tel & Fax 0577/310021 E-mail geo.ricerche@virgilio.it


Ubicazione prova




Curva HVSR

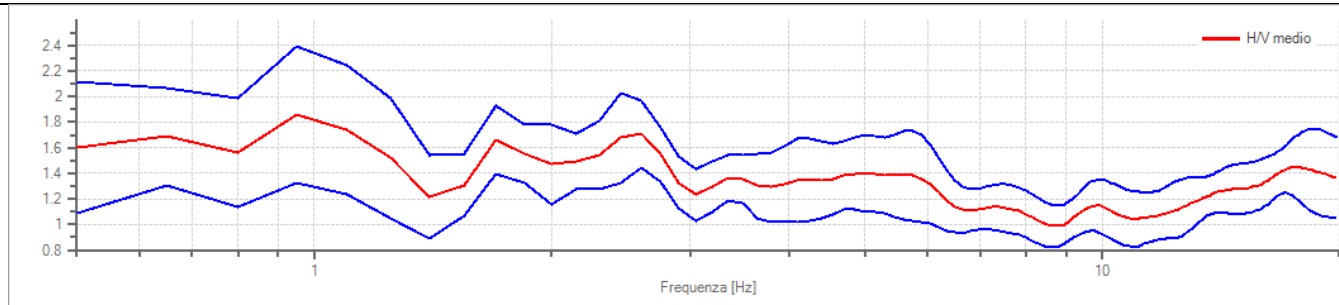


Spettri delle singole componenti

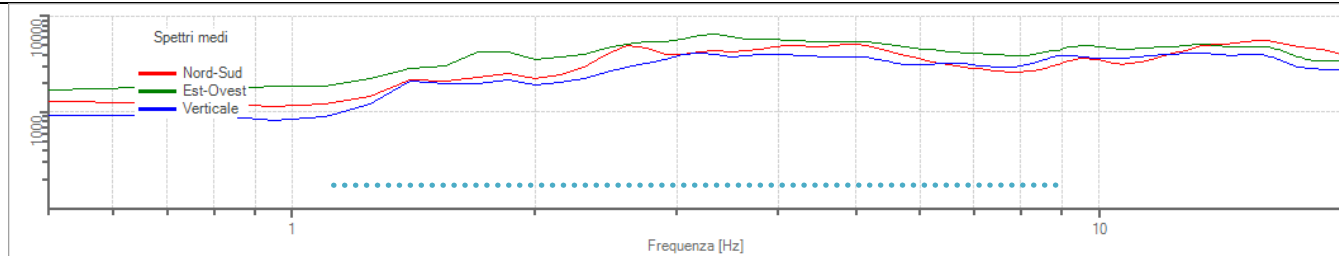

Direzionalità

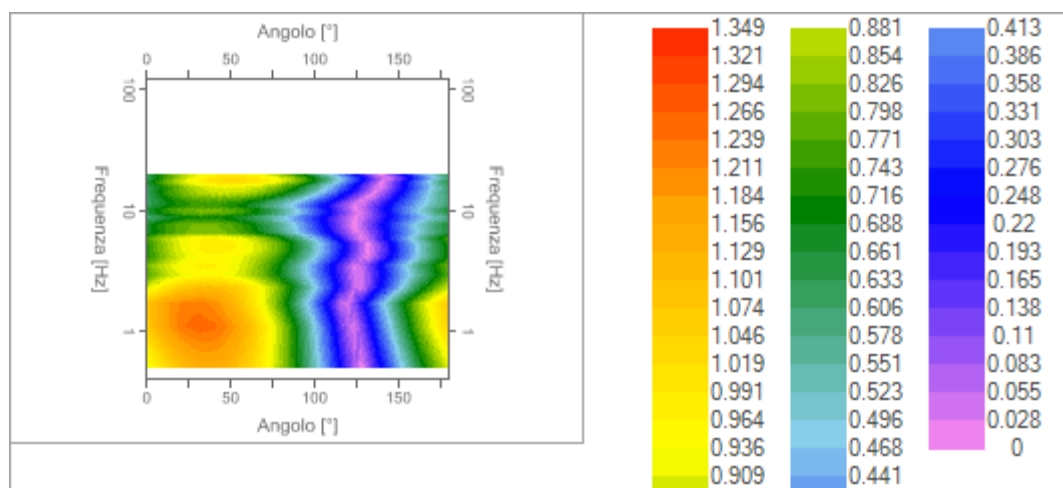

Serie temporale

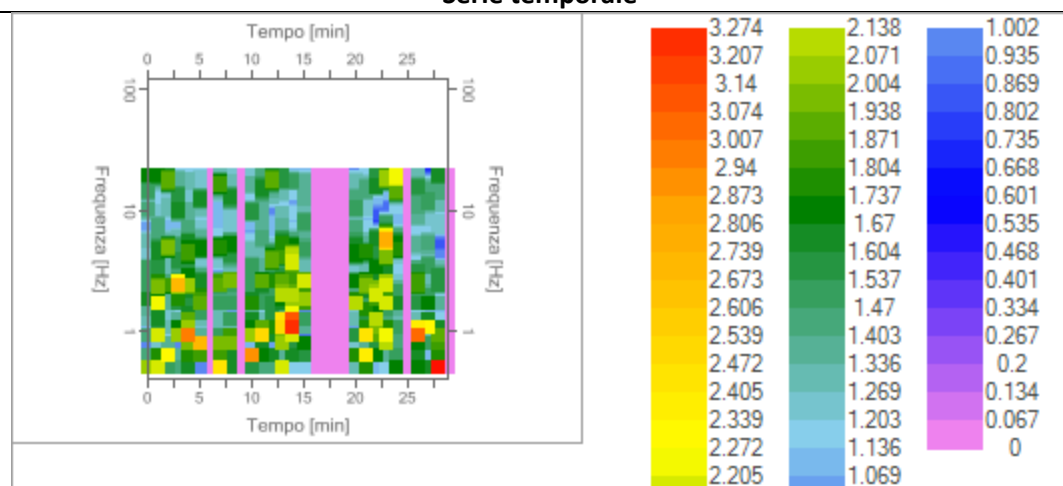

Picco H/V a 0.95 ± 0.29 Hz (nell'intervallo 0.5 -20 Hz)

Criteri per una curva H/V affidabile

(Tutti e tre i criteri devono essere soddisfatti)

Verifica	Esito
$f_0 > 10/l_w$	Ok
$n_c(f_0) > 200$	Ok
$\sigma_A(f) < 2$ per $0.5 \cdot f_0 < f < 2 \cdot f_0$ se $f_0 > 0.5H_s$ $\sigma_A(f) < 3$ per $0.5 \cdot f_0 < f < 2 \cdot f_0$ se $f_0 < 0.5H_s$	Ok
Criteri per un picco H/V chiaro (Almeno cinque criteri su sei devono essere soddisfatti)	
$\exists f^- \in [f_0/4, f_0] \mid A_{H/V}(f^-) < A_0/2$	NO
$\exists f^+ \in [f_0, 4 \cdot f_0] \mid A_{H/V}(f^+) < A_0/2$	NO

$A_0 > 2$	NO
$f_{picco}[A_{H/V}(f) \pm \sigma_A(f)] = f_0 \pm 5\%$	Ok
$\sigma_f < \varepsilon(f)$	Ok
$\sigma_A(f_0) < \theta(f_0)$	Ok

Legenda

L_w	window length
n_w	number of windows used in the analysis
$n_c = L_w n_w f_0$	number of significant cycles
f	current frequency
f_0	H/V peak frequency
σ_f	standard deviation of H/V peak frequency
$\varepsilon(f_0)$	threshold value for the stability condition $\sigma_f < \varepsilon(f_0)$
A_0	H/V peak amplitude at frequency f_0
$A_{H/V}(f)$	H/V curve amplitude at frequency f
f^-	frequency between $f_0/4$ and f_0 for which $A_{H/V}(f^-) < A_0/2$
f^+	frequency between f_0 and $4f_0$ for which $A_{H/V}(f^+) < A_0/2$
$\sigma_A(f)$	standard deviation of $A_{H/V}(f)$, $\sigma_A(f)$ is the factor by which the mean $A_{H/V}(f)$ curve should be multiplied or divided
$\sigma_{\log H/V}(f)$	standard deviation of $\log A_{H/V}(f)$ curve
$\theta(f_0)$	threshold value for the stability condition $\sigma_A(f) < \theta(f_0)$

Threshold values for σ_f and $\sigma_A(f_0)$

Freq.range [Hz]	< 0.2	0.2 – 0.5	0.5 – 1.0	1.0 – 2.0	> 2.0
$\varepsilon(f_0)$ [Hz]	$0.25 f_0$	$0.2 f_0$	$0.15 f_0$	$0.10 f_0$	$0.05 f_0$
$\theta(f_0)$ for $\sigma_A(f_0)$	3.0	2.5	2.0	1.78	1.58
Log $\theta(f_0)$ for $\sigma_{\log H/V}(f_0)$	0.48	0.40	0.30	0.25	0.20